



QuickRelease®



Set Programs



SmartTouch®  
Controller  
(Rotex Air Pro only)



Pneumatic



Membrane  
(Rotex Air Pro Multi only)



Preheat



- Standard 40x50 cm plate
- Optimal heat & pressure distribution
- Robust frame

- Suitable for laser transfer applications & pretreatment drying
- Ideal for medium production
- Manufactured in France
- 2-year guarantee on the machine
- 10-year guarantee on heating plate


User friendly :

- \* Complete lateral clearance of the plate
- \* Pneumatic closing & opening
- \* Automatic rotation at the end of the cycle


## OPTIONAL ACCESSORIES



Support table




DTG plate




Set of 4 plates




Laser pointer



Teflon Sheet



Nomex® cover



Shoe plate



Compressor

Email

sales@sefa.fr  
support@sefa.fr  
www.sefa.fr



Phone

Office : + 33 4 68 74 05 89  
Fax : + 33 4 68 74 24 08



Address

SEFA SAS  
Z.I. PASTABRAC  
11 260 ESPERAZA (FR)


## TECHNICAL CHARACTERISTICS

Type	Pneumatic
Operation	Swing - Rotating Plate
Platen size	40x50 cm / 16x20"
Max thickness	21 mm
Weight	104 Kg / 229 lbs
Pressure	732 gr/cm <sup>2</sup>
°C / °F Max	220 °C / 429 °F
Power	2500 W (Rotex Air Lite) 3200 W (Rotex Air Pro)
Power supply	240 V Single-phase
Amperage	11 A (Rotex Air Lite) 14 A (Rotex Air Pro)
Applications	ChromaLuxe, Flex, Direct to Garment, Pretreatment, Sublimation Rigid Substrate, Textile Sublimation, Screen Printing, Laser Transfer
Dimension	847x572x621 mm


## OPTIONAL ACCESSORIES



**TAB-98 LITE**  
Support table




**PLA-DRY M**  
Sponge plate to dry pretreated clothes.




**PLA-SET**  
Set of 4 plates  
12 x 8 cm, 15 x 15 cm,  
12 x 45 cm, 25 x 30 cm.



**CROI-161**  
Laser system to place your transfers with more precision (1 extra laser can be added).



**PLA-SHOES-CV**  
Special plate that fit textile and sport shoes (side and back).



**HOU-50**  
Heat resistant Nomex® cover for easier threading and protection.



**COMP-74**  
Silent compressor 42dB  
24L - 74Lt/min.

## SETTINGS



Electronics developed by Sefa  
Accurate and fast regulation (PID control) for a wide range of heat transfer products : Flex, flock, sublimation, screen printing transfer.  
Double timer (main + pre-heat)

2 cycle counters  
3 settable programs  
Stop cycle function  
From 0 to 570 sec (precision +/- 1%).  
From 0 to 220°C (precision +/- 1%).  
Heating time to reach 180°C : 15 min.

### ROTEX AIR LITE

SmartTouch® controller developed by Sefa

Recipes menu with adaptive regulation parameters depending on the job: flex, sublimation on textile, sublimation on rigid substrates, DTG...

- Advanced electronics
- 10 fully editable recipes menus
- Independent time for each plate with Multi timer
- Cycle counters
- Stop cycle function
- ECO GREEN mode


From 0 to 600 sec (precision +/- 1%).  
From 15 to 255°C (precision +/- 1%).  
Heating time to reach 180°C : 10 min.

### ROTEX AIR PRO



180° reversible  
C-shaped lower part with Quick Release system

## DIMENSIONS

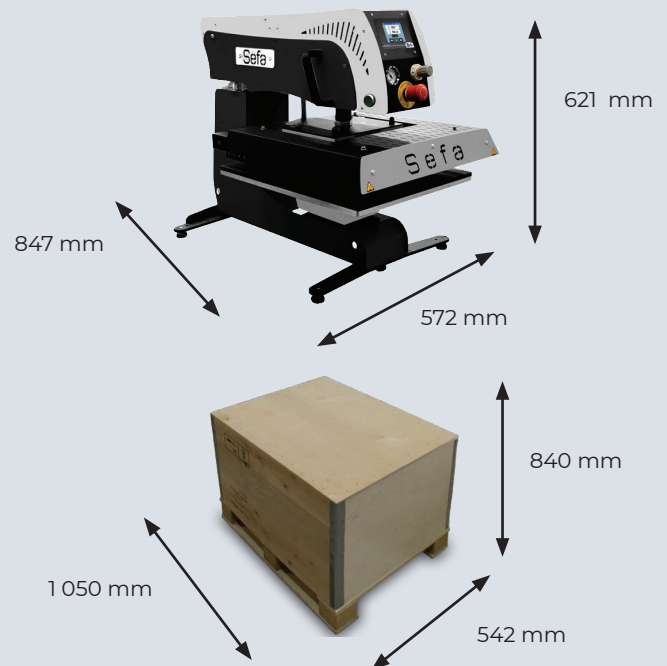

Box weight CAI-100 : 25 kg